Horse/Bridge

Quattro[®]

Tiles


The Rubber & Resin Specialists



Quattro's Horse Tiles are a high density conglomerated rubber crumb tile that are used on Walkways, Stable Yards and Equestrian Bridges for the safety of horse and rider.

The tiles themselves are porous and with the 15mm raster base (egg box type base) will allow water to drain underneath if the subbase allows.

The Horse Tiles are normally bonded to the subbase with our Superflex Membrane resin adhesive to prevent movement when exposed to the elements and with wear and tear. The 40mm can also be fitted loose and pinned together.

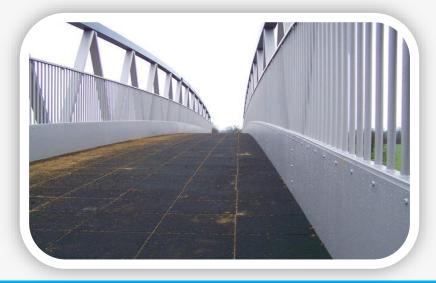

Product Information

Product: Equine High Density Rubber Tiles

Surface Profiles: Plain or Brick Effect

MOQ of 240m² for Brick Effect

Base Profiles: Flat or 15mm Raster (20mm Flat Only)

Colours: Black, Red or Green

Material: Recycled SBR Granulate and Fibres bound

by Polyurethane Resin

Dimensions: 500mm x 500mm or 1000mm x 1000mm

Thicknesses: 20mm, 30mm & 40mm

Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ


Tel: 01768864977 Email: enq@quattrorubberandresin.co.uk Web: www.quattrorubberandresin.co.uk




Quattro[®]

Horse Tile

The Rubber & Resin Specialists

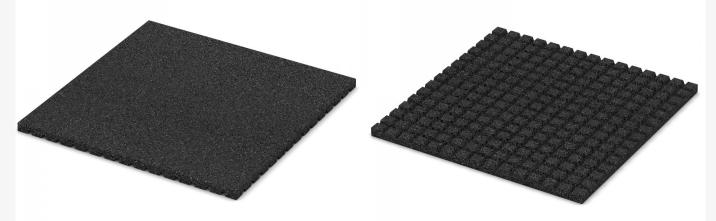

Technical Data	
Weight per m²	Solid 20mm: 18kg/m ² Solid 30mm: 27kg/m ² Solid 40mm: 36kg/m ² Raster 30mm: 21.88kg/m ² Raster 40mm: 30.88kg/m ²
Dimension Deviation	Max 1.5% - depending on temperature changes and moisture content
Thickness Tolerance	+/- 1.0mm
Density	900kg/m³
Slip Resistance	Mean correct Pendulum Test Value 48 to 50 using a standard skid resistance pendulum test B.S. EN 13036-4:2011 (RECOMMENDED MINIMUM VALUE OF 40)
Long Term Thermal Stability	-30°C +80°C
Short Term Thermal Stability	Up to +110°C
Colour Stability	Colour will fade out with UV exposure over time
Chemical Resistance	Resistant to weak acids and Iyes conditionally resistant to oils

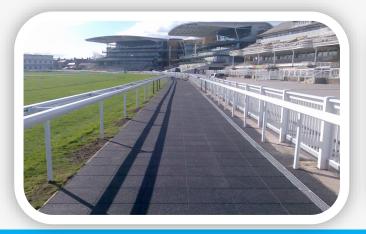



Equestrian • Agricultural • Gym • Play





