


### GRIP TOP INTERLOCKING TILES

- High quality, anti-skid & durable rubber floor tile
- 18mm & 22mm Thick
- 1m x 1m with Interlocking Edge
- Very High density 6MPA Rubber
- Easy to lay and fit to size
- Interlocking connectable edges
- Attractive round studded surface on both sides
- Reversible for longer life expectancy
- Easy to wash down surface
- Can also be used in stables and walkways



### 43MM DOG BONE PAVERS

- Made from a heavy duty durable crumb rubber
- High Density for Heavy Usage
- Easy interlocking design for area coverage
- Can be bonded for heavy traffic areas
- Slip resistant finish
- High impact and resilience
- Excellent protection from falls
- Attractive 'paved' look design
- Easily replaced
- Available in Black or Red

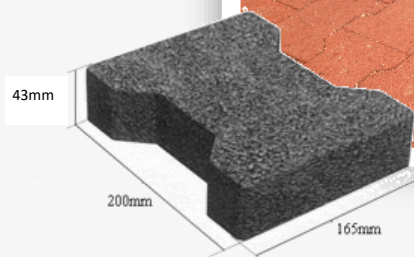


Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: [enq@quattro-rubber-and-resin.co.uk](mailto:enq@quattro-rubber-and-resin.co.uk) Web: [www.quattro-rubber-and-resin.co.uk](http://www.quattro-rubber-and-resin.co.uk)



### How to work out the area of a Horsewalker Walking Track in m<sup>2</sup>

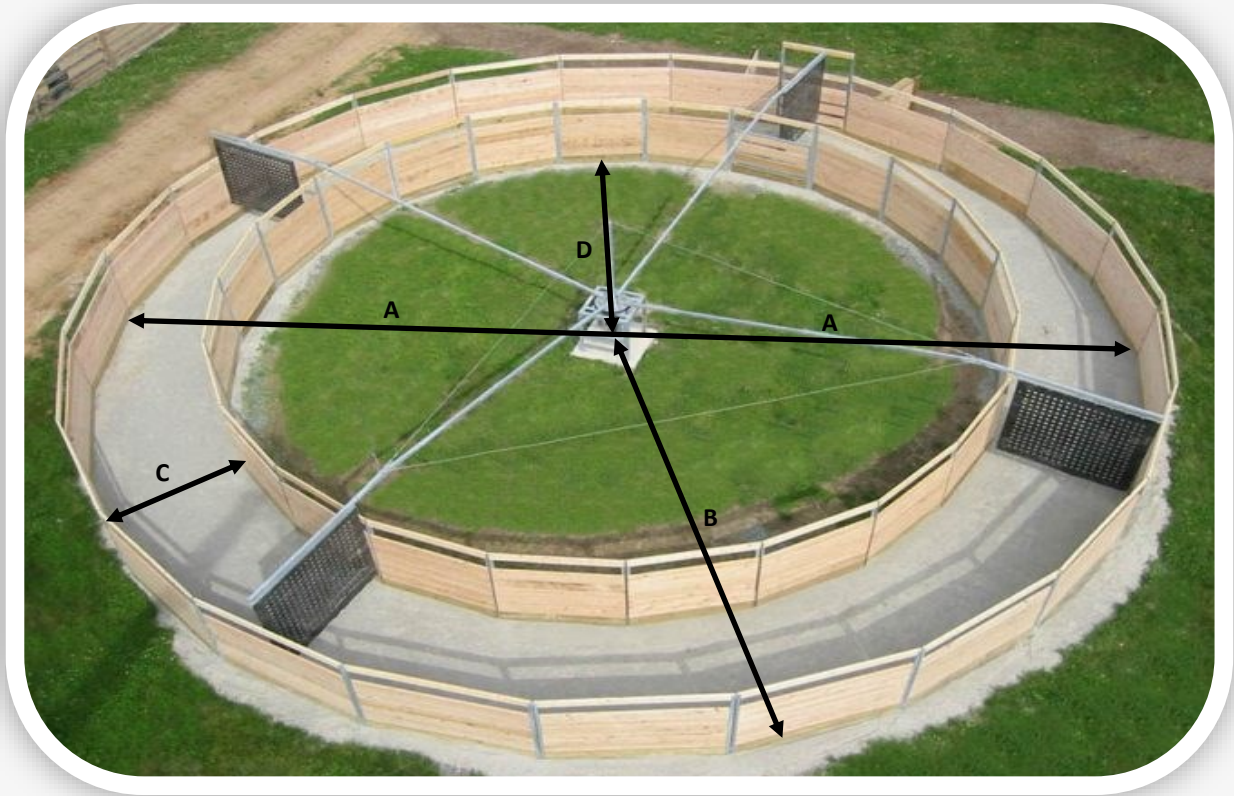

Divide the Diameter of Horsewalker (**A**) by 2 to get the Radius (**B**)


**B x B x 3.14** = Full Area of the Horsewalker

Take away the Walking Track Width (**C**) from the Radius (**B**). This will give you the Radius of the Inner Circle (**D**)

**D x D x 3.14** = Area of the Inner Circle

Full Area of the Horsewalker minus the Area of the Inner Circle = Area of the Walking Track

If this is done in feet and not metres divide the final measurement by 10.76 to get the square meterage

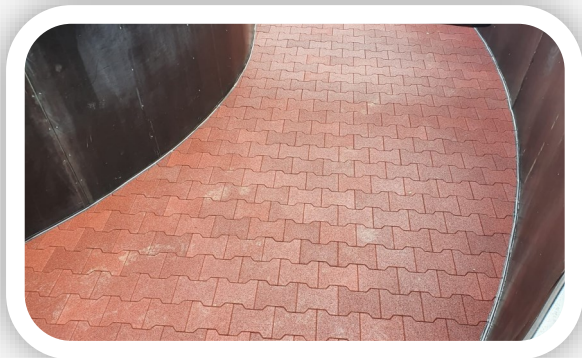

**Equestrian • Agricultural • Gym • Play**

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: [enq@quattro-rubber-and-resin.co.uk](mailto:enq@quattro-rubber-and-resin.co.uk) Web: [www.quattro-rubber-and-resin.co.uk](http://www.quattro-rubber-and-resin.co.uk)




# QUATTRO<sup>®</sup>

## Walker Wall Roll

The Rubber & Resin Specialists



Quattro's Walker Wall Roll is a very heavy duty rubber roll with insertion running through the centre for extra strength. The rubber has a smooth finish so won't cause any damage to horses if they rub against it. The Walker Wall Roll is fixed to the frame of the Horse walker to a height of 1.2m (4ft) or 1.8m (6ft) Standard thickness of the rubber is 10mm but other thicknesses are available.

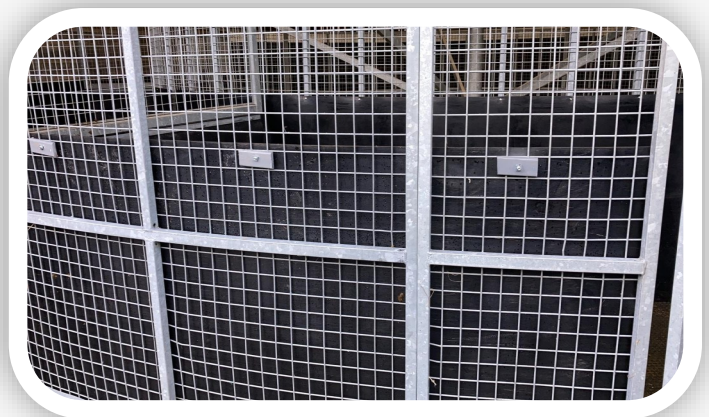

Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: [enq@quattro-rubber-and-resin.co.uk](mailto:enq@quattro-rubber-and-resin.co.uk) Web: [www.quattro-rubber-and-resin.co.uk](http://www.quattro-rubber-and-resin.co.uk)

