

QUATTRO®


Bonded & Sealed Stable Matting

The Rubber & Resin Specialists



Quattro developed the Fully Bonded & Joint Sealed matting system over 20 years ago to alleviate the problem of urine, bedding and dirt getting under loose fitted mats, which can make stables unhygienic and cause strong odours plus lifting mats in and out of stables to clean underneath is extremely difficult.

The Bonded & Sealed Matting can be fitted in to Stables, Wash Boxes, Treadmills, Turn Out Pens & Walkways
Quattro have a range of mats below that can be used for different areas and situations.



18mm or 22mm Supermats

Our most popular low profile mat for use in stables and where grip isn't a priority.



18mm Amoebic Mat

Low profile mat for stables and areas where easy cleaning is required.



18mm or 22mm Diamond Mats

Heavy duty grip mat for wash boxes, walkways, turn out pens and treadmill surrounds



25mm Comfort Mat

A mat that provides extra comfort and durability with a low profile for use in stables.

The stable mats we use are a minimum of 4Mpa tensile strength. The higher the tensile strength the better the quality of the mats. The majority of stable mats are 3Mpa or less and will spread and wear quickly if used for bonding and sealing.

The use of our higher density mats ensures the floors will stay hygienic and durable for a good number of years.

We also have the option of Joint Sealing Only which saves on cost and means the mats can be removed if required.

Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: enq@quattorubberandresin.co.uk Web: www.quattorubberandresin.co.uk



Bonded & Sealed Stable Matting


The Rubber & Resin Specialists



Quattro's range of high density mats can be bonded to new and existing floors using our Superflex Membrane. This specially developed rubber adhesive achieves a strong bond to the rubber mats and subbase.



Once the mats are in place the joints between the mats are cut out using a heated rubber groover. The cut strip is then removed to leave a clean open groove.

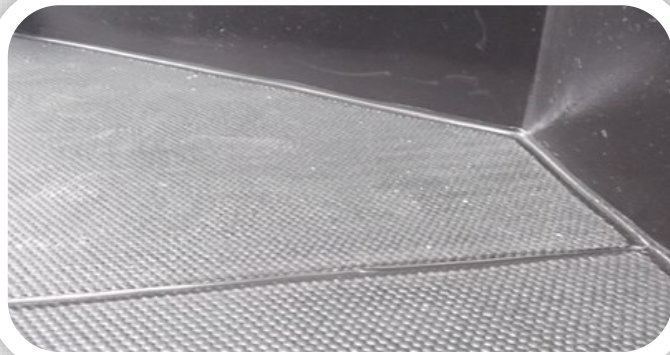

The joints are then sealed using our Q/Flex Gun applied flexible urethane resin as well as the perimeter of the area. Any residual sealant left on the surface of the mats will be removed with use.



Heavy duty plastic doorway strips are fitted in to doorways or along drains to protect the edge of the mats if no thresholds in place.



Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: enq@quattorrubberandresin.co.uk Web: www.quattorrubberandresin.co.uk

