



Quattro's Horse Tiles are a high density conglomerated rubber crumb tile that are used on Walkways, Stable Yards and Equestrian Bridges for the safety of horse and rider.

The tiles themselves are slightly porous and with the 15mm raster base (egg box type base) on the 40mm thick tiles this will allow water to drain underneath if the subbase allows. Water will also permeate down between each tile.

The Horse Tiles are normally bonded to the subbase with our Superflex Membrane resin adhesive to prevent movement when exposed to the elements and with wear and tear.



#### Product Information

**Product:** Equine High Density Rubber Tiles

**Surface Profiles:** Plain Top

**Base:** Flat or 15mm Raster (20mm & 30mm Flat Only)

**Colours:** Black, Red or Green

**Material:** Recycled SBR Granulate and Fibres bound by Polyurethane Resin

**Dimensions:** 500mm x 500mm or 1000mm x 1000mm

**Thicknesses:** 20mm, 30mm & 40mm

**Equestrian • Agricultural • Gym • Play**


Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: [enq@quattrorubberandresin.co.uk](mailto:enq@quattrorubberandresin.co.uk) Web: [www.quattrorubberandresin.co.uk](http://www.quattrorubberandresin.co.uk)




## Horse Tile

The Rubber & Resin Specialists

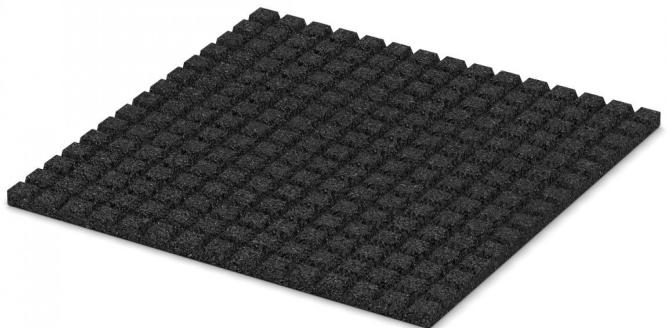

### Technical Data

Weight per m <sup>2</sup>	Solid 20mm: 18kg/m <sup>2</sup> Solid 30mm: 27kg/m <sup>2</sup> Solid 40mm: 36kg/m <sup>2</sup> Raster 40mm: 30.88kg/m <sup>2</sup>
Dimension Deviation	Max 1.5% - depending on temperature changes and moisture content
Thickness Tolerance	+/- 1.0mm
Density	900kg/m <sup>3</sup>
Slip Resistance	RATING DRY: 80-86   RATING WET: 58-63 Using a standard skid resistance pendulum test to BS 7188:1998 (RECOMMENDED MINIMUM VALUE OF 40)
Flammability	Low Ignition Rating to BS 7188:1998
Long Term Thermal Stability	-30°C .... +80°C
Short Term Thermal Stability	Up to +110°C
Colour Stability	Colour will fade out with UV exposure over time
Chemical Resistance	Resistant to weak acids and lyes conditionally resistant to oils

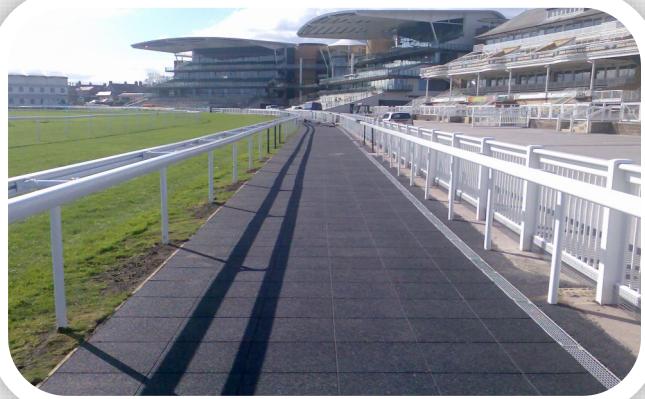

Equestrian • Agricultural • Gym • Play

Quattro Products Limited, Milestone House Ind Est, Penrith, Cumbria, CA11 9NQ

Tel: 01768864977 Email: [enq@quattrorubberandresin.co.uk](mailto:enq@quattrorubberandresin.co.uk) Web: [www.quattrorubberandresin.co.uk](http://www.quattrorubberandresin.co.uk)

